


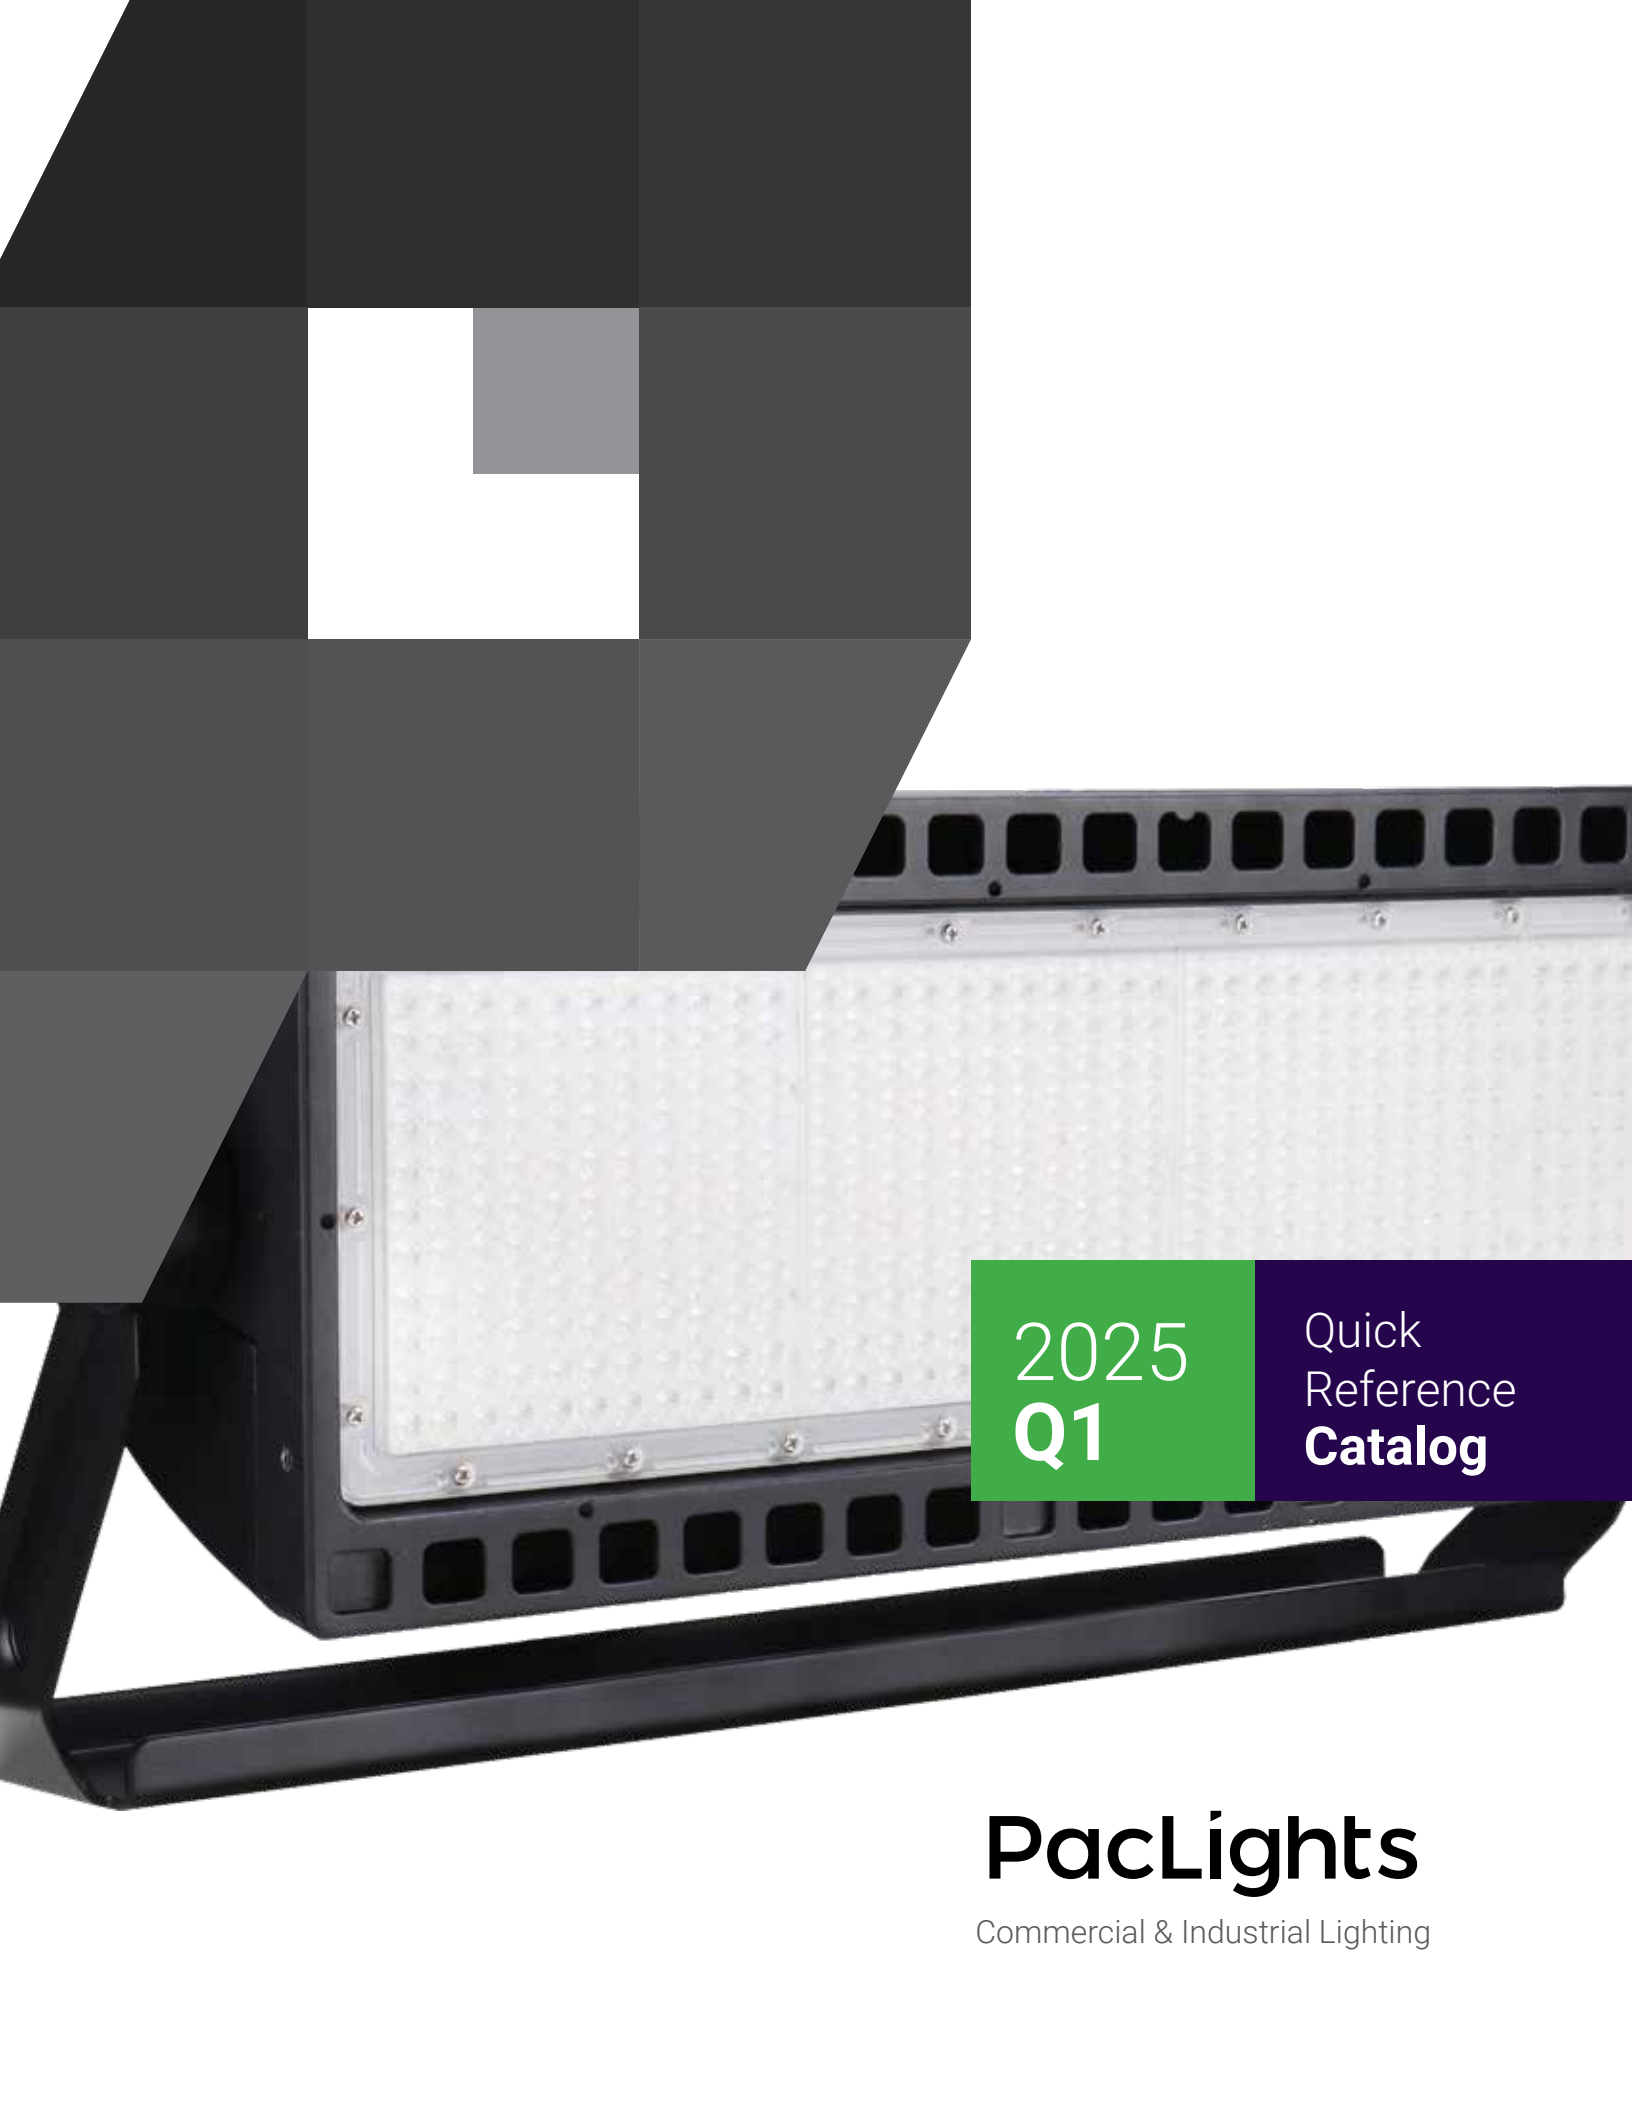


2025
Q1

Quick
Reference
Catalog

PacLights

Commercial & Industrial Lighting



Use Phone's Camera App
Capture QR codes on this
sheet to view product info



Try it out now!
Capture QR code to Visit
www.PacLights.com

HIGHBAY

FLHE series control ready dual panel linear highbay

14,000 - 60,000 Lumen

Controls Ready, 4000/5000K Selectable

78w - 400w LED



Major Models	Wattage	Lumens
FLHE-20/17/14LM	135/115/92	20/17/14,000
FLHE-30/28/23LM	200/185/155	30/28/23,000
FLHE-40/34LM	270/230	40/34,000
FLHE-60/54LM	400/360	60/54,000



Scan to view
Spec Sheet

FLHB series single panel linear highbay

15,000 - 60,000 Lumen

4000/5000K Selectable

100w - 400w LED



GEN 2

Major Models	Wattage	Lumens
FLHB/2-20/17/15LM	135/115/100	20/17/15,000
FLHB/2-30/28/23LM	200/185/155	30/28/23,000
FLHB/2-40/34LM	270/230	40/34,000
FLHB/2-60/50LM	400/340	60/50,000



Scan to view
Spec Sheet

FLHQ series control ready diecast multi-beam linear highbay

15,000 - 46,000 Lumen

35/40/5000K CCT & Beam Angle Selectable

Wattage Selectable 105w - 320w LED



GEN 2, NEW!

Major Models	Wattage	Lumens
FLHQ/2-160/130/105	160/130/105	23/18/15,000
FLHQ/2-240/210/180	240/210/180	34/30/26,000
FLHQ/2-320/295/255	320/295/255	46/42/36,000



Multi-Beam Selectable: 90°x 90°(regular), 70°x 100°(aisle)
or 40°x 100° (narrow aisle)

Scan to view
Spec Sheet

FVTA series IP66 vapor tight NSF certified linear highbay

17,000 - 33,000 Lumen

4ft, 3500/4000/5000K CCT & Watt. Selectable

100w - 200w LED, IP66, NEMA 4X, IK10 Rated



GEN 2

Major Models	Wattage	Lumens
FVTA/2-135/115/100	135/115/100	22/19/17,000
FVTA/2-200/185/155	200/185/155	32/30/26,000



Scan to view
Spec Sheet

FHUS series IP65 NSF certified round highbay

12,000 - 36,000 Lumen

Controls Ready, 3500/4000/5000K Selectable

90w - 240w LED, Watt. Selectable



GEN 3

Major Models	Volt	Wattage	Lumens
FHUS/3-150-UV	120-277	150/120/90	21/16/12,000
FHUS/3-240-UV	120-277	240/200/180	33/28/25,000
FHUS/3-150-HV	480	150/120/90	21/16/12,000
FHUS/3-240-HV	480	240/200/180	33/28/25,000



Scan to view
Spec Sheet

FHUW series high lumen IP65 round highbay

41,000 - 56,000 Lumen

Controls Ready, 5000K or 4000K available

300w, 400w LED



Major Models	Volt	Wattage	CCT	Lumens
FHUW-300-UV-50	120-277	300	5000	42,000
FHUW-400-UV-50	120-277	400	5000	56,000
FHUW-300-HV-50	480	300	5000	42,000
FHUW-400-HV-50	480	400	5000	56,000



Scan to view
Spec Sheet

STRIP & WRAP

FSLE series performance linear strip

2,000 - 12,000 Lumen

2ft, 4ft, 8ft. Control & EM models Available
15w - 90w LED, 3500/4000/5000K Selectable



Sensor Option



OUTPUT & CCT
FIELD
ADJUSTABLE



MOTION CONTROL
OPTION



DAYLIGHT
HARVESTING
OPTION



EMERGENCY
BACKUP
OPTION

Major Models	Length	Wattage	Lumens
FSLE-4D30L	4 ft	30/25/18	4,000/3,500/2,600
FSLE-4D40M	4 ft	40/30/25	5,300/4,000/3,500
FSLE-4D45H	4 ft	45/38/34	6,000/5,200/4,700
FSLE-8D65M	8 ft	65/60/55	8,500/8,100/7,600
FSLE-8D90H	8 ft	90/75/65	12,000/10,000/9,000



Scan to view
PDF Spec Sheet

FSLA series easy-link linear strip

2,100 - 11,200 Lumen

2ft, 4ft, 8ft. Control & EM models Available
Easy Link in Row, 30/40/50/57/65K Selectable



OUTPUT & CCT
FIELD
ADJUSTABLE



MOTION CONTROL
OPTION



DAYLIGHT
HARVESTING
OPTION



EMERGENCY
BACKUP
OPTION

GEN 3, NEW!

Major Models	Length	Wattage	Lumens
FSLA/3-2D	2 ft	25/20/15	3,500/2,800/2,100
FSLA/3-4D	4 ft	40/30/20	5,600/4,200/2,800
FSLA/3-8D	8 ft	80/70/60	11,200/9,800/8,400



Scan to view
PDF Spec Sheet



Easy Link
No Rewiring

FVTB series IP66 waterproof and vapor tight strip

4,600 - 11,900 Lumen

4 ft / 8 ft length, 3500/4000/5000K Selectable
34 - 90w LED, Watt. Selectable



OUTPUT & CCT
FIELD
ADJUSTABLE



MOTION CONTROL
OPTION



EMERGENCY
BACKUP
OPTION



IP66

Major Models	Length	Wattage	Lumens
FVTB-4D	4 ft	45/38/34	6,000/5,100/4,700
FVTB-8D	8 ft	90/75/65	11,900/10,100/9,000



Scan to view
PDF Spec Sheet



waterproof and
vapor tight

FSWA series industrial wrap

4,000 - 5,300 Lumen

4 ft length, 3500/4000/5000K Selectable
40/35/30w LED, Watt. Selectable



OUTPUT & CCT
FIELD
ADJUSTABLE



MOTION CONTROL
OPTION



EMERGENCY
BACKUP
OPTION

Major Models	Wattage	Lumens
FSWA-4D	40/35/40	5,300/4,700/4,100



Scan to view
PDF Spec Sheet



FSWC series architectural wrap

4,700 - 6,000 Lumen

4 ft length, 3500/4000/5000K Selectable
45/38/34w LED, Watt. Selectable



OUTPUT & CCT
FIELD
ADJUSTABLE



MOTION CONTROL
OPTION




EMERGENCY
BACKUP
OPTION

Major Models	Wattage	Lumens
FSWC-4D	45/38/34	6,000/5,100/4,700



Scan to view
PDF Spec Sheet



FSWE series essential wrap

4,000 - 5,600 Lumen

4 ft length, 3500/4000/5000K Selectable
48/40/32w LED, Watt. Selectable



OUTPUT & CCT
FIELD
ADJUSTABLE



MOTION CONTROL
OPTION




EMERGENCY
BACKUP
OPTION

Major Models	Wattage	Lumens
FSWE-4D	48/40/32	5,600/4,800/4,000



Scan to view
PDF Spec Sheet



FSLE series Stairwell Lighting - SpaceX "Megabay"



TROFFER & PANEL

FPNB series performance flat panel

3,000 - 6,000 Lumen

2x4', 2x2', 1x4'. sensor models available
20w - 25w LED, 3500/4000/5000K Selectable



GEN 3

Major Models	Size	Wattage	Lumens
FPNB/3-24D	2x4 ft	50/40/30	6,000/5,100/3,900
FPNB/3-22D	2x2 ft	40/30/25	4,800/3,900/3,400
FPNB/3-14D	1x4 ft	40/30/25	4,800/3,900/3,400



Sensor integrated Models
AVAILABLE

Scan to view
PDF Spec Sheet

FTFS series performance center basket troffer

2,700 - 5,900 Lumen

2x4', 2x2', 1x4'. sensor models available
20 - 45w LED, 3500/4000/5000K Selectable



GEN 2

Major Models	Size	Wattage	Lumens
FTFS/2-24D	2x4 ft	45/38/34	5,900/5,100/4,600
FTFS/2-22D	2x2 ft	30/25/20	3,800/3,300/2,700
FTFS/2-14D	1x4 ft	30/25/20	3,800/3,300/2,700



Sensor integrated Models
AVAILABLE

Scan to view
PDF Spec Sheet

FPNB & FDLA series Office Lighting

BLUETOOTH



FSLN series bluetooth network control enabled strip

1,600 - 12,000 Lumen

2ft, 4ft, 8ft. Bluetooth Control Enabled
up to 90w trimmable, 3000-5000K tunable



Models	Length	Wattage	Lumens
FSLN-2D25	2 ft	25w trimmable	3,300L trimmable
FSLN-4D45	4 ft	45w trimmable	6,000L trimmable
FSLN-8D90	8 ft	90w trimmable	12,000L trimmable



works with
Keilton APP



optional sensor
KEILTON-IFS108E

Scan to view
PDF Spec Sheet

FPNN series bluetooth network control enabled flat panel

up to 6,400 Lumen

2x4', 2x2', 1x4'. Bluetooth Control Enabled
up to 50w trimmable, 3000-5000K tunable



Models	Size	Wattage	Lumens
FPNN-24D50	2x4 ft	50w trimmable	6,400L trimmable
FPNN-22D30	2x2 ft	30w trimmable	3,800L trimmable
FPNN-14D30	1x4 ft	30w trimmable	3,800L trimmable



works with
Keilton APP



optional sensor
KEILTON-IFS108E

Scan to view
PDF Spec Sheet

FTFN series bluetooth network control enabled troffer

up to 5,800 Lumen

2x4', 2x2', 1x4'. Bluetooth Control Enabled
up to 45w trimmable, 3000-5000K tunable



Models	Size	Wattage	Lumens
FTFN-24D45	2x4 ft	45w trimmable	5,800L trimmable
FTFN-22D35	2x2 ft	35w trimmable	4,500L trimmable
FTFN-14D30	1x4 ft	30w trimmable	3,800L trimmable



works with
Keilton APP



optional sensor
KEILTON-IFS108E

Scan to view
PDF Spec Sheet

RKTN series bluetooth network enabled troffer LED retrofit kit

up to 5,760 Lumen

2x4', 2x2', 1x4'. Bluetooth Control Enabled
up to 45w trimmable, 3000-5000K tunable



Models	Size	Wattage	Lumens
RKTN-24D45	2x4 ft	45w trimmable	5,700L trimmable
RKTN-22D30	2x2 ft	30w trimmable	3,800L trimmable
RKTN-14D30	1x4 ft	30w trimmable	3,800L trimmable



works with
Keilton APP



optional sensor
KEILTON-IFS108E

Scan to view
PDF Spec Sheet

DOWNLIGHT

FDLA series downlight for new build or retrofit



500 - 3,200 Lumen

4", 6", 8", 10" commercial grade 120-277v
6w - 33w LED, 3000/3500/4000K Selectable



OUTPUT & CCT
FIELD
ADJUSTABLE



EMERGENCY
BACKUP
OPTION

Major Models	Size	Wattage	Lumens
FDLA04D12	4"	12/8/6	1,100/750/570
FDLA06D16	6"	16/12/8	1,500/1,100/750
FDLA08D22	8"	22/16/12	2,100/1,500/1,100
FDLA10D33	10"	33/28/22	3,200/2,600/2,100



Scan to view
PDF Spec Sheet

WALL

FWPT series semi cutoff wall pack

GEN 2



4,200 - 22,000 Lumen

3000K/4000/5000K Color Selectable
29w - 150w LED, Photocell Included



CCT FIELD
ADJUSTABLE



PHOTO CONTROL
INCLUDED



MOTION CONTROL
OPTION



EMERGENCY
BACKUP
OPTION

Major Models	Wattage	CCT	Lumens
FWPT/2-029-3CCT	29w	3/4/5000K	4,200 L
FWPT/2-040-3CCT	40w	3/4/5000K	5,800 L
FWPT/2-060-3CCT	60w	3/4/5000K	8,700 L
FWPT/2-080-3CCT	80w	3/4/5000K	12,000 L
FWPT/2-100-3CCT	100w	3/4/5000K	14,400 L
FWPT/2-120-3CCT	120w	3/4/5000K	17,600 L



Scan to view
PDF Spec Sheet

FWPC series full cutoff wall pack



4,800 - 21,000 Lumen

3000K/4000/5000K Color Selectable
40w - 150w LED, Photocell Included



CCT FIELD
ADJUSTABLE



PHOTO CONTROL
INCLUDED



MOTION CONTROL
OPTION



EMERGENCY
BACKUP
OPTION

Major Models	Wattage	CCT	Lumens
FWPC-040-3CCT	40w	3/4/5000K	5,700 L
FWPC-060-3CCT	60w	3/4/5000K	8,600 L
FWPC-080-3CCT	80w	3/4/5000K	11,400 L
FWPC-100-3CCT	100w	3/4/5000K	14,600 L
FWPC-120-3CCT	120w	3/4/5000K	16,800 L
FWPC-150-3CCT	150w	3/4/5000K	21,300 L



Scan to view
PDF Spec Sheet

FWPR series wall mount with angle adjustable light modules

GEN 2



3,200 - 16,500 Lumen

3000K/4000/5000K Color Selectable models
25w - 120w LED



CCT FIELD
ADJUSTABLE



MOTION CONTROL
OPTION



EMERGENCY
BACKUP
OPTION

Major Models	Wattage	CCT	Lumens
FWPR/2-025-3CCT	25w	3/4/5000K	3,200 L
FWPR/2-040-3CCT	40w	3/4/5000K	5,600 L
FWPR/2-060-3CCT	60w	3/4/5000K	8,000 L
FWPR/2-080-3CCT	80w	3/4/5000K	11,000 L
FWPR/2-120-50	120w	5000K	16,500 L
FWPR/2-120-40	120w	4000K	16,200 L



Scan to view
PDF Spec Sheet

PARKING LOT

FALC series performance area light - pole or surface mount

GEN 3



10,000 - 63,000 Lumen

3000K/4000/5000K Color Selectable
80w - 450w LED, Watt. Selectable



OUTPUT & CCT
FIELD
ADJUSTABLE



SECONDARY
SURGE PROTECTOR



MOTION CONTROL
OPTION



CONTROLS
COMPATIBLE

Major Models	Wattage	Lumens
FALC/3-150/100/080	150/100/80	20/14/10,000
FALC/3-300/240/200	300/240/200	40/33/27,000
FALC/3-450/400/350	450/400/350	60/53/46,000

IES Distribution: Type III standard, also available in Type II, Type IV or Type V, optional visor.

Mount: Arm(adjustable), Slipfitter, Trunnion, Flood or Wall



Scan to view
PDF Spec Sheet

FPTA series post top light

GEN 2



6,600 - 20,000 Lumen

Available in 4000K or 5000K Color
55w, 75w or 150w models



MOTION CONTROL
OPTION



CONTROLS
COMPATIBLE

Major Models	Wattage	Lumens
FPTA/2-055	55w	6,800 L
FPTA/2-075	75w	10,000 L
FPTA/2-150	150w	20,000 L

55W/75W is best with 10'/15' poles, 150W is best suited for 20' or taller poles. Adapter is available (optional) for Rounds poles more than 3" or Square poles.



Scan to view
PDF Spec Sheet



Scan to view
PDF Tenons
Spec Sheet



NEW! QuickShip

10' to 30' square or round steel poles,
tenon adapters, and bullhorns



FLOOD - LOW/MID OUTPUT

FFLE series performance flood with an integrated visor

GEN 2

2,000 - 45,000 Lumen

3000K/4000/5000K Color Selectable

15w - 300w LED, Watt. Selectable



Photocell: 15-100w included.
Mount: Knuckle 15-100w, Flood mount 120-300w. Trunnion, Slipfitter or Arm.
480v: models available

Major Models	Wattage	Lumens
FFLE/2-060/050/040	60/50/40	9,000/7,500/6,000
FFLE/2-100/090/080	100/90/80	15/13/12,000
FFLE/2-150/135/120	150/135/120	22/20/18,000
FFLE/2-240/220/200	240/220/200	36/33/30,000
FFLE/2-300/280/260	300/280/260	45/42/39,000



Scan to view
PDF Spec Sheet

SPORTS / HIGH OUTPUT FLOOD

FFHE series 1000w metal halide replacement flood and sport

NEW!

56,000 - 84,000 Lumen

Available in 5000K; special order on other CCT up to 600w LED, True 1000w MH Replacement



w/ optional knuckle & glare shield

Major Models	Wattage	Lumens
FFHE-400-UV-50	400w	56,000 L
FFHE-500-UV-50	500w	70,000 L
FFHE-600-UV-50	600w	84,000 L



Scan to view
PDF Spec Sheet

Beam: 30° **Glare Shield:** Optional
Mount: Standard Trunnion mount, optional Slipfitter or Knuckle
NEMA 7-pin Receptacle: Standard **480v:** Optional

FFHL series 1500w metal halide replacement flood and sport

GEN 2, NEW!

92,000 - 114,000 Lumen

Available in 5000K; special order CCT or RGBW up to 800w LED, True 1500w MH Replacement



w/ optional knuckle & glare shield

Major Models	Wattage	Lumens
FFHL/2-600-UV-50	600w	92,000 L
FFHL/2-700-UV-50	700w	103,000 L
FFHL/2-800-UV-50	800w	114,000 L



Scan to view
PDF Spec Sheet


Beam: 35°, optional 20°, 55°, 90° **Glare Shield:** optional
Mount: Standard Trunnion mount, optional Slipfitter or Knuckle
Zhaga Z10 Receptacle: Standard **480v:** Optional **RGBW:** Optional

FFHS series performance sports light

GEN 3

56,000 - 171,000 Lumen

Available in 5000K, special order on other CCT 400/500/600/750/1000/1200w models



Standard: 120-277v, NEMA twist lock receptacle
Optional: 480v, Glare shield, detachable driver, slipfitter

Major Models	Wattage	CCT	Lumens
FFHS/3-500-50	500w	5000K	71,000 L
FFHS/3-600-50	600w	5000K	85,000 L
FFHS/3-750-50	750w	5000K	106,000 L
FFHS/3-1000-50	1000w	5000K	142,000 L
FFHS/3-1200-50	1200w	5000K	170,000 L



Scan to view
PDF Spec Sheet

FFHS series Washington Middle-High School
Greenville, MS

ROADWAY

FSTA series performance roadway

GEN 2

5,000 - 33,000 Lumen

Available in 4000K or 5000K Color 40w - 240w LED, Watt. Selectable



Major Models	Wattage	CCT	Lumens
FSTA/2-L-40	60/50/40	4000K	8,600/7,200/5,700 L
FSTA/2-M-40	90/75/60	4000K	12/10/8,000 L
FSTA/2-H-40	120/100/80	4000K	17/14/11,000 L
FSTA/2-X-40	240/200/150	4000K	32/27/20,000 L



Scan to view
PDF Spec Sheet

Glare shield: optional
Control Receptacle: NEMA 7-pin twist lock receptacle

FHMA series performance highmast

28,000 - 106,000 Lumen

Available in 4000K, special order on other CCT 200/300/450/500/600/750w models



Major Models	Wattage	CCT	Lumens
FHMA-300-4000	300w	4000K	43,000 L
FHMA-500-4000	500w	4000K	75,000 L
FHMA-750-4000	750w	4000K	106,000 L



Scan to view
PDF Spec Sheet

Glare shield: optional
Control Receptacle: NEMA 7-pin twist lock receptacle
480v: optional

CANOPY

FCPA series high lumen 20x20" full size canopy

GEN 2



21,000 - 35,000 Lumen

Available in 4000K or 5000K Color
150w, 180w, 240w LED




Major Models	Wattage	CCT	Lumens
FCPA/2-150-50	150w	5000K	21,000 L
FCPA/2-180-50	180w	5000K	25,000 L
FCPA/2-240-50	240w	5000K	34,000 L



Scan to view
PDF Spec Sheet

FCPC series performance 15x15" canopy



12,000 - 19,000 Lumen

Available in 4000K or 5000K Color
95w, 120w, 150w LED



Major Models	Wattage	CCT	Lumens
FCPC-095-50	95w	5000K	12,500 L
FCPC-120-50	120w	5000K	15,800 L
FCPC-150-50	150w	5000K	19,500 L



Scan to view
PDF Spec Sheet

FCPG series parking garage/canopy

GEN 3



4,000 - 12,500 Lumen

3000K/4000/5000K Color Selectable models
30w - 90w LED, Watt. Selectable



Major Models	Wattage	Lumens
FCPG/3-60/45/30	60/45/30	8,400/6,200/4,100 L
FCPG/3-90/75/60	90/75/60	12,000/10,000/8,400 L



Scan to view
PDF Spec Sheet



Microwave Motion Control: SE-HS-HB01DMSA
PIR Motion Control: SE-HS-HB03DPRA



FCPG series Cleveland, OH

HAZARDOUS LOCATION

FHZR series Class I Div II, Round



7,200 - 23,000 Lumen

Available in 5000K, special order on other CCT
60w, 100w, 150w models

UL Listed Class I, Division II, Group A, B, C, D hazardous location lights for industrial applications, and comes with IP66, UL 1598, UL 8750 and UL 844 ratings


Major Models	Wattage	CCT	Lumens
FHZR-060-50	60w	5000K	8,000 L
FHZR-100-50	100w	5000K	14,000 L
FHZR-150-50	150w	5000K	22,000 L



Lens: Clear flat lens, or Frosted globe drop lens
Optional: Wireguard, 480v models

Scan to view
PDF Spec Sheet

FHZL series Class I Div II, Linear



5,400 - 16,800 Lumen

Available in 5000K, special order on other CCT
40w (2ft), 80w (4ft), 120w (4ft) models

UL Listed Class I, Division II, Group A, B, C, D hazardous location lights for industrial applications, and comes with IP66, UL 1598, UL 8750 and UL 844 ratings

Major Models	Wattage	CCT	Lumens
FHZL-040-50	40w	5000K	5,600 L
FHZL-080-50	80w	5000K	11,200 L
FHZL-120-50	120w	5000K	16,800 L



Standard: Trunnion mount, 110° lens.
Optional: Wireguard, chain mount, pole mount, surface mount, 480v models, 20° / 30° / 60° / 80° lens.

Scan to view
PDF Spec Sheet

RETROFIT

RKTF series troffer LED retrofit kit

GEN 2



2,600 - 6,300 Lumen

2x4', 2x2', 1x4'. 35/40/5000K Selectable
20 - 45w LED, Watt. Selectable



Major Models	Size	Wattage	Lumens
RKTF/2-24D-35/30/25	2x4'	35/30/25	49/42/35 00 L
RKTF/2-24D-45/38/34	2x4'	45/38/34	63/53/47 00 L
RKTF/2-22D-30/25/20	2x2'	30/25/20	42/35/28 00 L
RKTF/2-14D-30/25/20	1x4'	30/25/20	42/35/28 00 L



Scan to view
PDF Spec Sheet



optional sensor SE-KE-IFS06R

