



XHB Series LED High Bay Installation Sheet

The XHB LED luminaire comes with an XHB Base, available optional Hook and Conduit mounts, and M4 screws to secure them. Below are examples of these features and the wiring for the XHB LED luminaire.

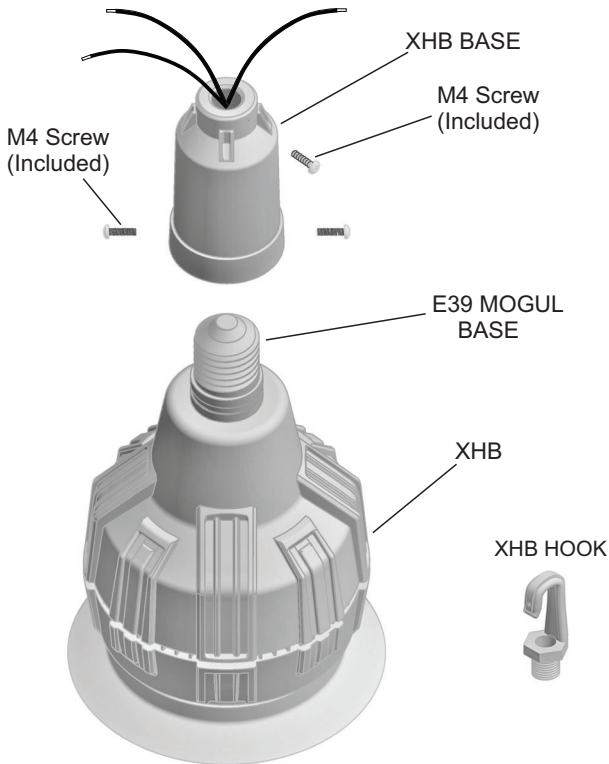


(A) RETROFIT

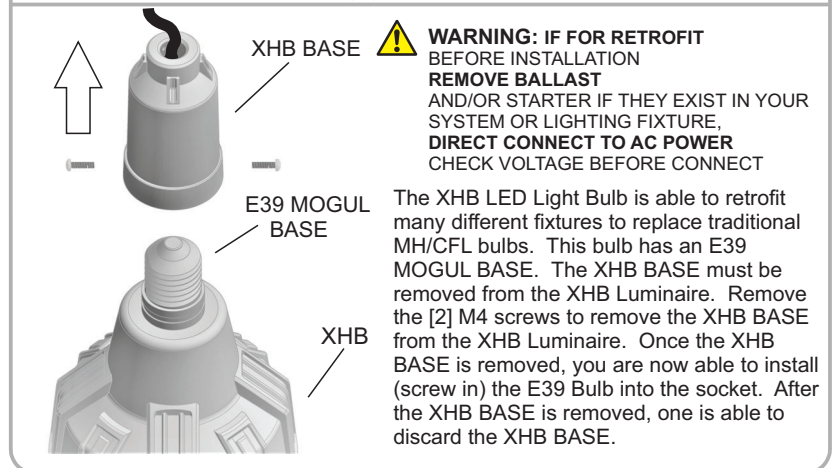


(B) HOOK MOUNT

The XHB LED luminaire has an optional Hook Mount which can be used to hang the fixture to a desired height. The Hook mount can be added to install into a Chain Link or an Eye Hook (Both not included). Loosen the M4 screw from the XHB Base to install (screw in) the Hook Mount into the XHB Base. Tighten the M4 screw to hold the Hook Mount in place.

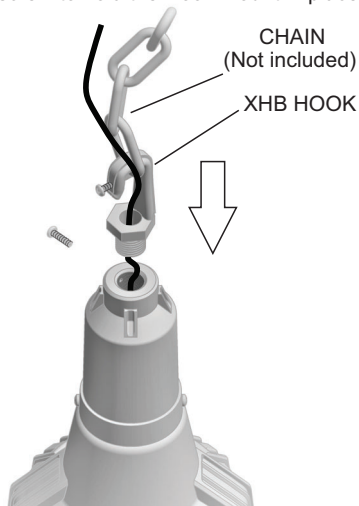

(C) CONDUIT MOUNT

The XHB LED luminaire has an optional Conduit Mount and Access Port (Both not included) which can be attached to an existing conduit pipe. Loosen the M4 screw from the XHB Base to install (screw in) the 3/4" Conduit into the XHB Base. Tighten the M4 screw to hold the conduit pipe in place.

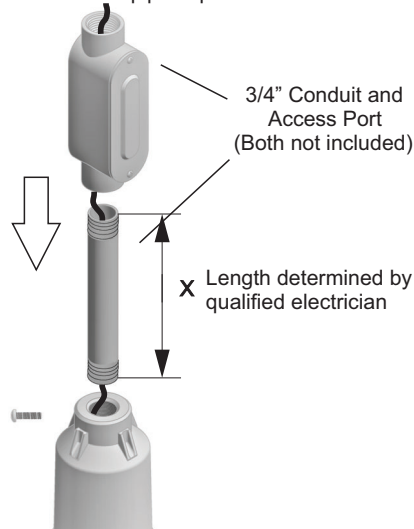

The XHB luminaire has 3 wires at the top of the XHB Base for Power, Ground and Neutral. It also has 2 wires at the side for the optional 0-10V dim device to be attached.

