
FCPB Series LED Canopy Light Installation Guide






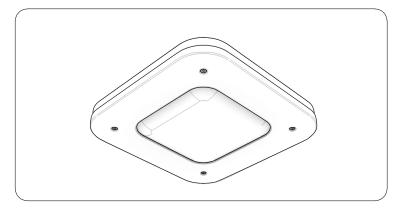


CAUTION: PLEASE FOLLOW THIS INSTRUCTION MANUAL CAREFULLY TO PREVENT ANY INJURIES OR COMPLICATIONS THAT MAY ARISE.

WARNING: Before installing or maintaining the luminary, make sure all powers are TURNED OFF.

PART NO.	IMAGE	DESCRIPTION	QTY
10-00013		M8-1.25 x 40 mm Sockethead Machine Screw	4




1) Drill [4] small holes 10.55" OC. using this template. At the center of the 4 holes, also cut a notch on the ceiling to allow the wiring from the FCPB to be powered with the AC Power Supply cable. Minimum notch size is 1.5" diameter hole. (As long as there is access to wire above the ceiling.

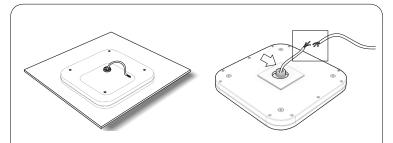

2) Feed the center cable from the FCPB through the center notch on the ceiling and connect the cables with the AC Power Supply Cable. Be sure to make all connections inside a j-box. (J-Box not included). Follow the Wiring Diagram below for more inststructions.

WIRING DIAGRAM: Connect the ACL and the ACN from the driver to the conduit with the AC Power Supply cords. Follow the Wiring Diagram provided. INSIDE J-BOX · · · PRE-CONNECTED ACL [BROWN/BLACK] HOT [BLACK] (DO NOT DISCONNECT) IN PU NEUTRAL [WHITE] ACN [BLUE/WHITE] [BLACK] TO LOAD LED DRIVER GROUND [GREEN] V(+) GROUND [GREEN] [LED BOARD] [WHITE] [RED]

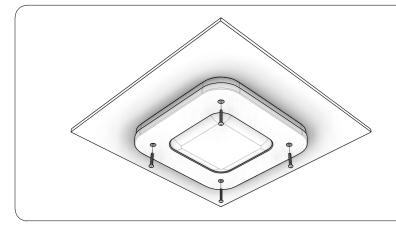


3) Once everything is properly wired, the last step is to fasten the FCPB to the ceiling .Use the [4] provided bolts to fasten the FCPB. This step must be checked by a qualified engineer to make sure the luminaire is safely secured into place.

Once the FCPB is properly fastened, you are now ready to enjoy Paclights' FCPB Canopy Light.



FCPB Series LED Canopy Light Installation Guide



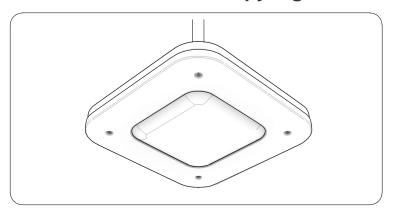





CAUTION: PLEASE FOLLOW THIS INSTRUCTION MANUAL CAREFULLY TO PREVENT ANY INJURIES OR COMPLICATIONS THAT MAY ARISE.

WARNING: Before installing or maintaining the luminary, make sure all powers are TURNED OFF.

PART NO.	IMAGE	DESCRIPTION	QTY
3/4" CONDUIT		3/4" CONDUIT	1

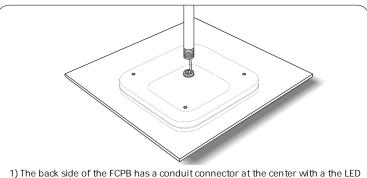

1) The back side of the FCPB has a conduit connector at the center with a the LED Driver Input cable sticking out. This luminaire can be installed by simply threading a 3/4" Conduit to the back side. This can be done once the FCPB is flush to the ceiling or without any ceiling surface present.



2) All wire connections must be made inside a Junction Box (not included). This will prevent any major accidents in case there is a short on the line or if a wire needs to be replaced. ALL POWERS MUST BE OFF when connecting the wires. Follow the Wiring Diagram below to properly wire the FCPB.

WIRING DIAGRAM: Connect the ACL and the ACN from the driver to the conduit with the AC Power Supply cords. Follow the Wiring Diagram provided. INSIDE J-BOX · · · PRE-CONNECTED ACL [BROWN/BLACK] HOT [BLACK] (DO NOT DISCONNECT) INPU NEUTRAL [WHITE] ACN [BLUE/WHITE] [BLACK] [BLACK] TO LOAD LED DRIVER GROUND [GREEN] V(+) [LED BOARD] [WHITE] [RED]

