


## EMA-8 Emergency LED Driver

Can be installed to : Any FPAN Series Fixture

**CAUTION:** PLEASE FOLLOW THIS INSTRUCTION MANUAL CAREFULLY TO PREVENT ANY INJURIES OR COMPLICATIONS THAT MAY ARISE.  
**WARNING:** Before installing or maintaining the luminaire, make sure all powers are **TURNED OFF**.  
 Verify that supply voltage is correct by comparing it with the label information on all fixtures.  
 Make all connections in accordance with the NEC requirements, and make sure all luminaries are properly secured to prevent any wire complications. This luminary is to always be installed with the lens facing down and its not to exceed the maximum ambient temperature rating noted on the specification sheet.

**STEP 1:** Make sure all powers are off. After you are sure the powers are off, cut the wires connecting the Load (LED Panel) with the original LED Driver (Output). This should consist of a red 14 gauge wire and a blue 14 gauge wire. Once the wires are cut, splice out the ends of the sleeves to expose the conductive wire on all 4 ends of the two cut wires.

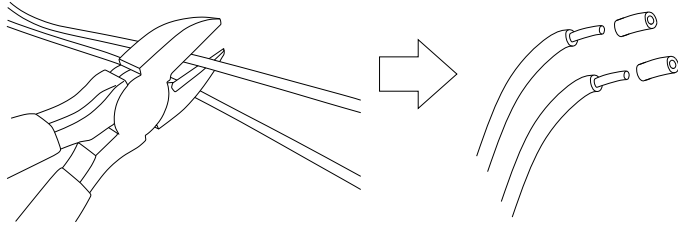

PART NO.	IMAGE	DESCRIPTION	QTY
1		EMA-8 Emergency LED Driver	1
2		Wire Cutting/ Splicing Tool (Not Included)	1
3		Wire Connectors and electrician tape to properly install Emergency Kit. ( Designs may vary, NOT INCLUDED)	10

**STEP 2:** Carefully follow this Wiring Diagram and have an authorized electrician wire the Power Supply to the Emergency Driver, to the LED Driver and to the LED Board. Use Wire Connectors and follow all of the NEC requirements to make this a safe installation.

