


FCPG/2 025/040/055



FCPG/2 075/100

IMPORTANT

READ CAREFULLY BEFORE INSTALLING FIXTURE. RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE.

PacLights fixtures must be wired in accordance with the National Electrical Code and all applicable local codes. Proper grounding is required for safety. THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

WARNINGS:

- Make certain power is OFF before installing or maintaining fixture. No user serviceable parts inside.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sharp objects.

CAUTION:

- For proper weatherproof function all gaskets must be seated properly and all screws inserted and tightened firmly. Apply weatherproof silicone sealant around the edge of the Back Box and/or Junction Box. This is especially important with an uneven wall surface. Silicone all plugs and unused conduit entries.

FCPG/2 3/4" NPT PENDANT MOUNT

- 1 The FCPG/2 fixture can be mounted with a Pendant Mount. Remove the Cap Screw from the top and loosen the Screws (2) from the side of the FCPG/2 fixture (Fig. 1). Open the Cover and install the Pendant Mount (Fig. 2). Add waterproof sealant on any possible opening that will allow fluids to enter the Cover. Use the wiring diagram provided to properly connect the fixture to the power supply. All connections must be compliant with NEC standards and must be performed by a certified electrician. Once all the wires are properly connected, close the FCPG/2 Cover and fasten the Screws (2) to secure the Cover in place (Fig. 3).

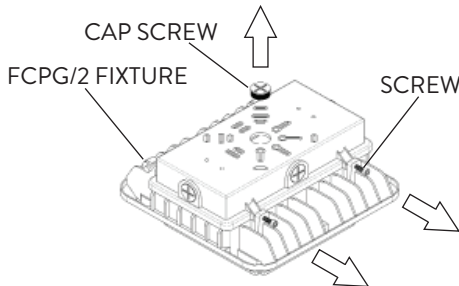


FIG. 1

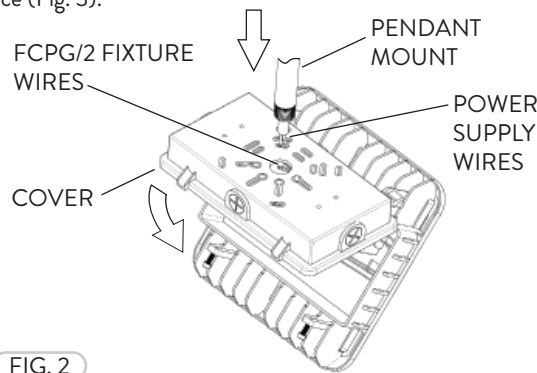


FIG. 2

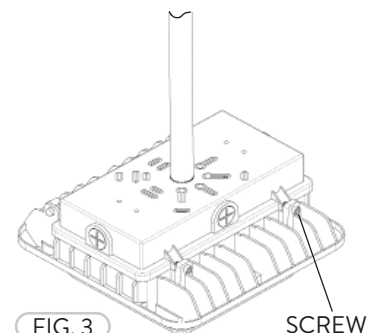


FIG. 3

WIRING DIAGRAM


Connect the ACL and the ACN from the FCPG/2 Fixture to the conduit with the AC power Supply Cable. Follow the Wiring Diagram provided.

AC POWER SUPPLY




FCPG/2 SURFACE MOUNT


- 1 The FCPG/2 fixture can be Surface Mounted. Loosen the Screws (2) at the side of the FCPG/2 fixture. Open and remove the Cover from the Hinges (Fig. 4). Drill the mounting holes into the pattern on the inside face (Fig. 5).

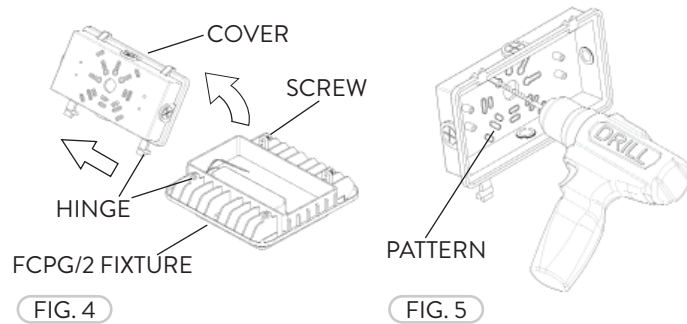

- 2 Fasten the FCPG/2 Cover and the foam felt Pad (to prevent liquids from entering) to the Mounting Surface with Mounting Screws (4) (Not provided). Install the FCPG/2 fixture onto the Hinges of the Cover (Fig. 6).

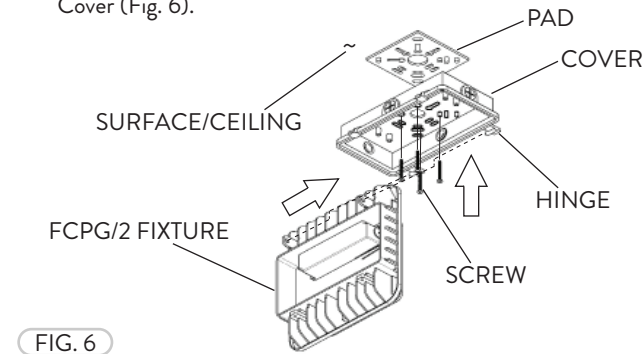


- 3 Attach the FCPG/2 fixture Wires to the Power Supply Cable Wires. Lift the FCPG/2 fixture up and fasten the Screws (2) to secure the fixture to the Cover (Fig. 7).

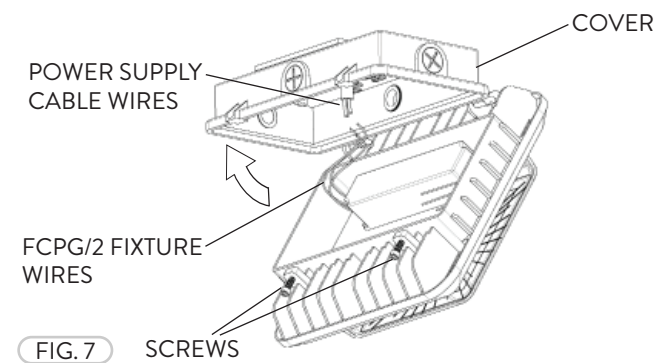


FCPG/2 TRUNNION MOUNT (OPTIONAL)

- 1 The Optional Trunnion Mount is available for all FCPG/2 fixtures. The Trunnion Mount consists of Suspended Brackets (3). Install the Fixture Brackets (2) onto the FCPG/2 fixture with the Screws (4) (Fig. 8). Install the Ceiling Bracket onto the ceiling/surface with Mounting Screws (Fig. 9).

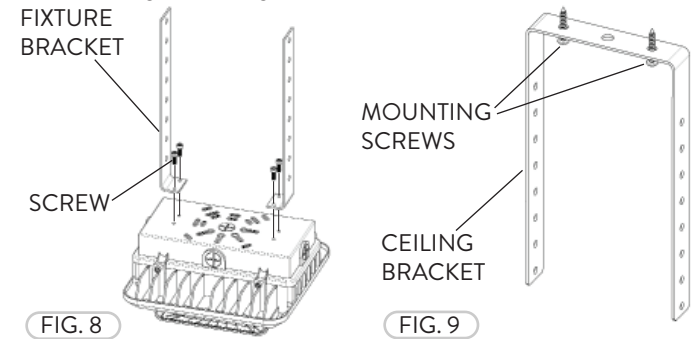

- 2 The Trunnion Mount Suspended Brackets are joined/assembled with Screws and Nuts (Fig. 10).

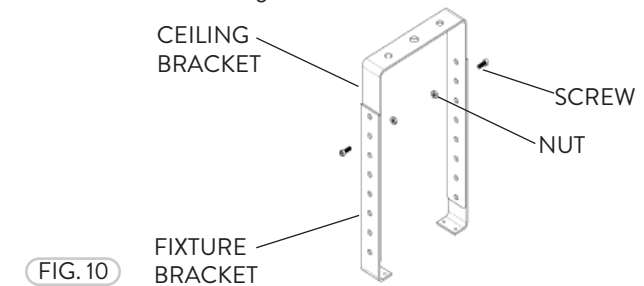

- 3 Remove the side Cap Screw and loosen the Screws (2) at the side of the Cover (Fig. 11). Open the Cover and install the Power Supply Conduit (Fig. 12). Use the wiring diagram provided to properly connect the fixture to the power supply. All connections must be compliant with NEC standards and must be performed by a certified electrician.

