






AC-LHA-CL2S/L(4S/L)- Clear Lens

Includes: FLHA2D090, FLHA2D110, FLHA2D162, FLHA4D178, FLHA4D223, FLHA4D321


CAUTION: PLEASE FOLLOW THIS INSTRUCTION MANUAL CAREFULLY TO PREVENT ANY INJURIES OR COMPLICATIONS THAT MAY ARISE.
WARNING: Before installing or maintaining the luminaire, make sure all powers are **TURNED OFF**.
Verify that supply voltage is correct by comparing it with the label information on all fixtures.
Make all connections in accordance with the NEC requirements, and make sure all luminaries are properly secured to prevent any wire complications. This luminaire is to always be installed with the lens facing down and its not to exceed the maximum ambient temperature rating noted on the specification sheet.

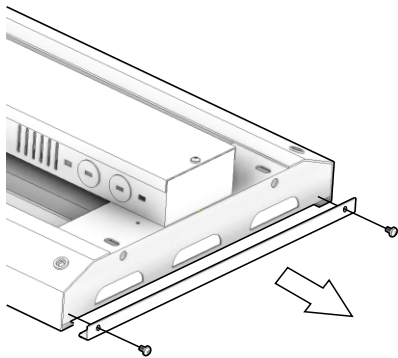


Step 1- Using a Phillips Screw Driver, remove the two screws from the side of the FLHA luminaire. After the two screws have been removed, place them down somewhere safe and remove the Side Angle from the fixture in order to access the default lens. It is important to not lose these screws because they will be used to fasten the luminaire back together once the new Clear Lens has been installed.

PART NO.	IMAGE	DESCRIPTION	QTY
AC-LHA-CL2S		Clear Lens for FLHA2D090 FLHA2D110	1
AC-LHA-CL2L		Clear Lens for FLHA2D162	1
AC-LHA-CL4S		Clear Lens for FLHA4D178 FLHA4D223	1
AC-LHA-CL4L		Clear Lens for FLHA4D321	1

Step 2- Slide out the default lens.

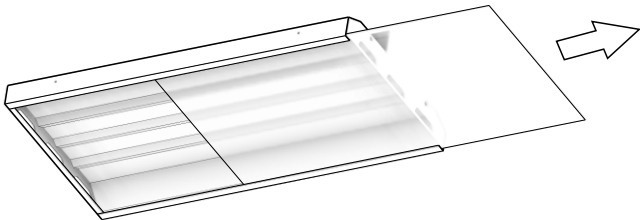

Step 3- Slide in the New Clear lens.

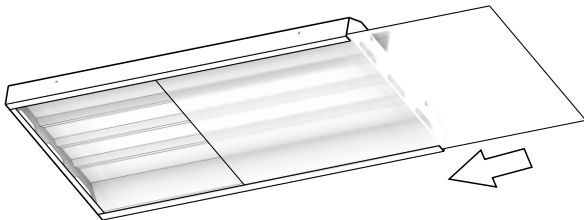

Step 4- Once the new lens has been installed, place the side angle back into place and fasten it back using the same screws used in Step 1.

