

IMPORTANT

SAFETY PRECAUTIONS

- To reduce the risk of death, personal injury or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards, read all warnings and instructions included with and on the fixture box and all fixture labels.
- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.
- Commercial installation, service and maintenance of luminaires should be performed by a qualified licensed electrician.
- For the installation: If you are unsure about the installation or maintenance of the luminaires, consult a qualified licensed electrician and check your local electrical code.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.


INSTALLATION NOTE

- Turn off electrical power at fuse or circuit breaker box before wiring fixture to the power supply.
- Turn off the power when you perform any maintenance.
- Verify that supply voltage is correct by comparing it with the luminaire label information.
- All wiring connections should be capped with UL approved wire connectors.


WARNING

- Avoid direct eye exposure to the light source while it is on.
- Account for small parts and destroy packing material, as these may be hazardous to children.
- Risk of burn. Disconnect power and allow fixture to cool before handling fixture.


PREPARATION

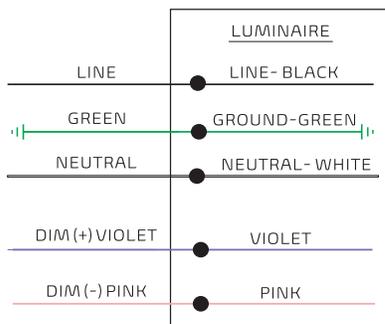

MOUNTING TEMPLATE

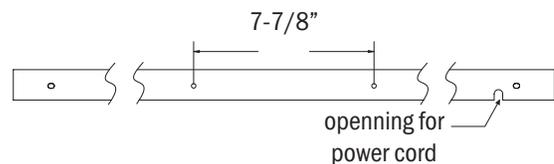

SURFACE MOUNT

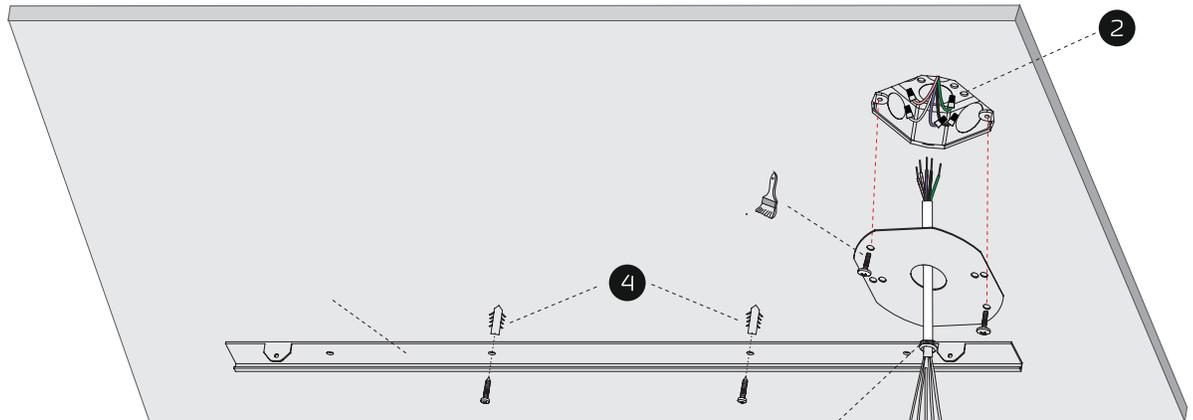


Wire Nut



Anchor




Screw PA4X30



Screw CM4X12







Power Cord




Surface Plate



Butterfly Drywall Anchor

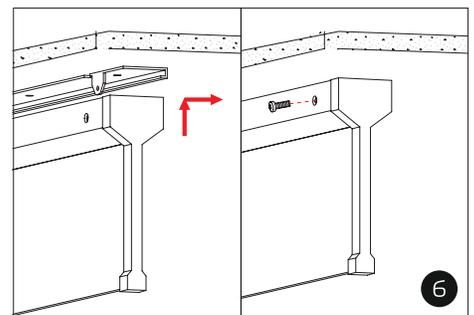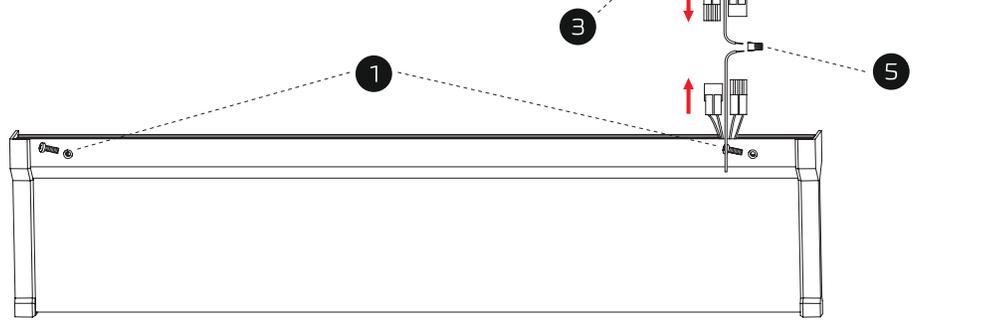

Solid Ceiling
drill 3/16" holes



Drywall Ceiling
drill 1/2" holes

1. Remove the cover with a screwdriver;
2. Connect the wires of the provided power cable to the junction box using wire caps. Cover the junction box with the surface plate, secure it with screws, and then plaster;
3. Insert the power cord into the cover opening as shown;
4. Secure the cover to the surface of ceiling;
5. Connect the wires using quick connectors and wire caps, then tuck all wires neatly into the junction box;
6. Secure the LED luminaire to the cover with screws.

WALL MOUNT



Wire Nut



Anchor




Screw PA4X30








Screw CM4X12




Power Cord



Surface Plate

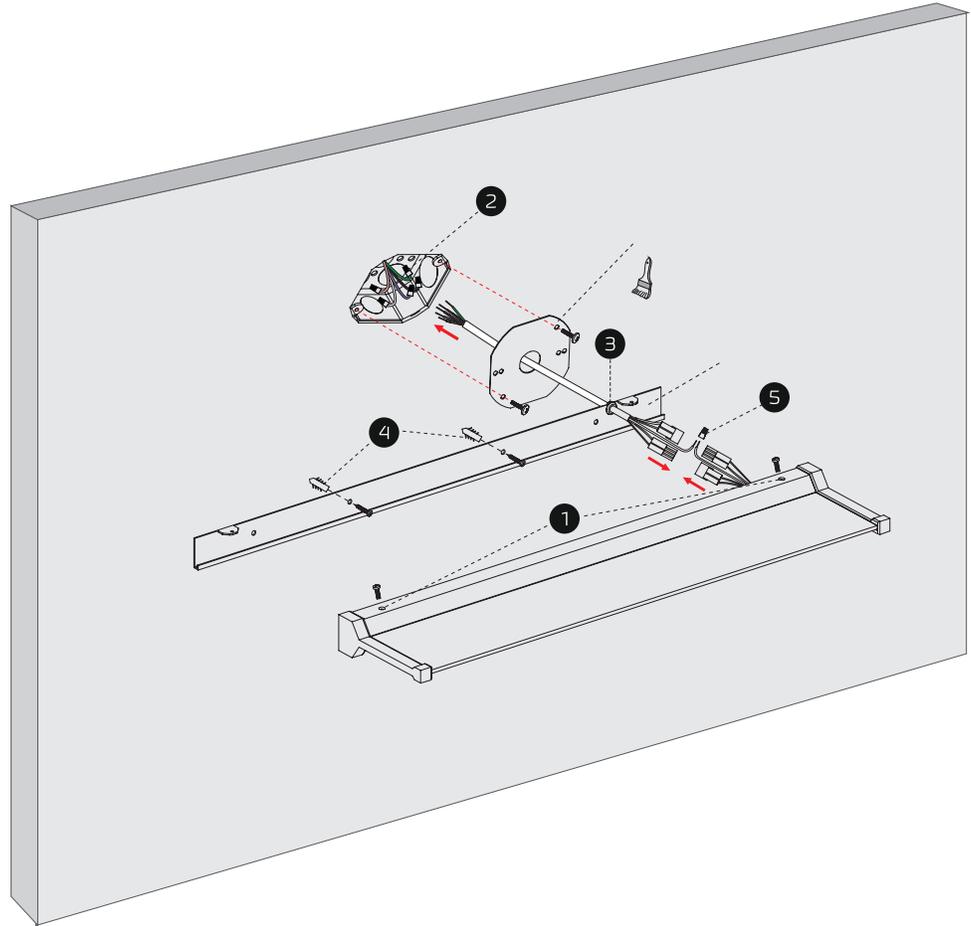

Solid Wall
drill 3/16" holes



Drywall
drill 1/2" holes

1. Remove the cover with a screwdriver;
2. Connect the wires of the provided power cable to the junction box using wire caps. Cover the junction box with the surface plate, secure it with screws, and then plaster;
3. Insert the power cord into the cover opening as shown;
4. Secure the cover to the surface of ceiling;
5. Connect the wires using quick connectors and wire caps, then tuck all wires neatly into the junction box;
6. Secure the LED luminaire to the cover with screws.