

IMPORTANT

SAFETY PRECAUTIONS

- To reduce the risk of death, personal injury or property damage from fire, electric shock, falling parts, cuts/abrasions, and other hazards, read all warnings and instructions included with and on the fixture box and all fixture labels.
- Before installing, servicing, or performing routine maintenance upon this equipment, follow these general precautions.
- Commercial installation, service and maintenance of luminaires should be performed by a qualified licensed electrician.
- For the installation: If you are unsure about the installation or maintenance of the luminaires, consult a qualified licensed electrician and check your local electrical code.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects.
- Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.


INSTALLATION NOTE

- Turn off electrical power at fuse or circuit breaker box before wiring fixture to the power supply.
- Turn off the power when you perform any maintenance.
- Verify that supply voltage is correct by comparing it with the luminaire label information.
- All wiring connections should be capped with UL approved wire connectors.


WARNING

- Avoid direct eye exposure to the light source while it is on.
- Account for small parts and destroy packing material, as these may be hazardous to children.
- Risk of burn. Disconnect power and allow fixture to cool before handling fixture.


OVERVIEW

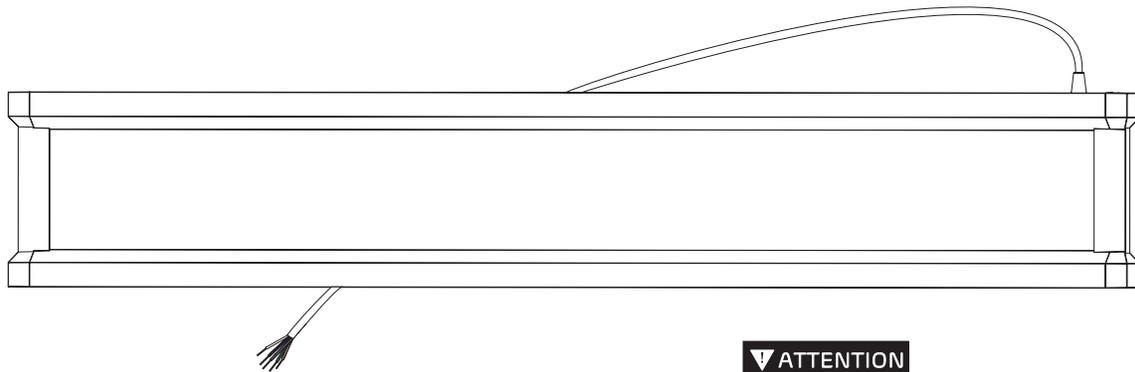

WIRING

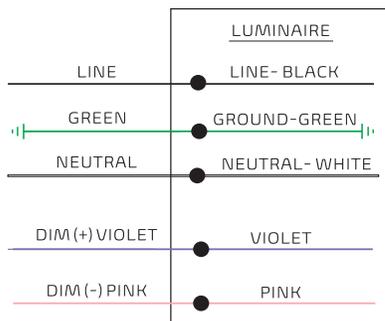

ATTENTION

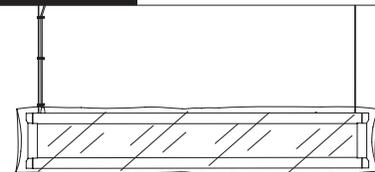


To prevent damage, keep the protective bag and films on the fixtures until construction is complete.


T-Grid Drop Ceiling

Suspended mounting kit and power cord are sold separately.
Parts list is for reference only; some items shown may not be included.


Power Feed

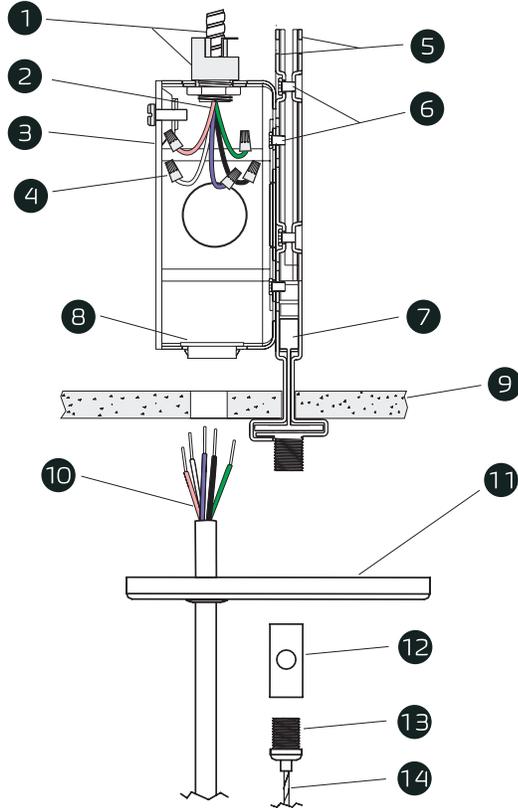


Non-power Feed

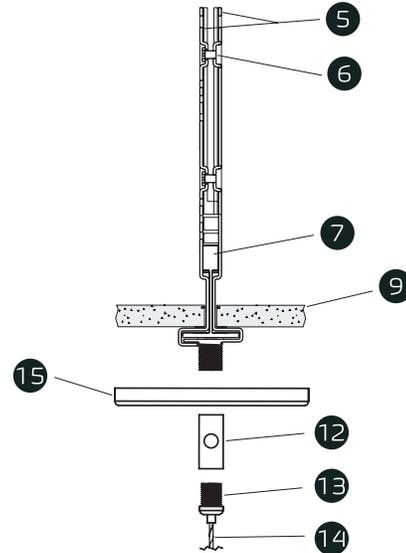


- 1 Armored Cable & Connector (By Others)
- 2 Branch Conductors (By Others)
- 3 4" Octagon Junction Box
- 4 Wire Nut
- 5 Assembled T-grid Clips
- 6 Screw 6#*4
- 7 T-grid (By Others)
- 8 Listed Cord Bushing (By Others) suitable for the cord size and the outlet box opening.
- 9 Ceiling Tile (By Others)
- 10 Power Cord
- 11 4" Canopy Power Kit
- 12 Cable Holder
- 13 Strain Relief Thread Nut
- 14 Aircraft Cable
- 15 2" Canopy



4" Octagon Junction Box




Wire Nut




Assembled T-grid Clips




Screw 6#*4




Listed Cord Bushing




Power Cord




4" Canopy Power Kit




Cable Holder



Strain Relief Thread Nut





Aircraft Cable




2" Canopy

Drywall Ceiling

Suspended mounting kit and power cord are sold separately.
Parts list is for reference only; some items shown may not be included.

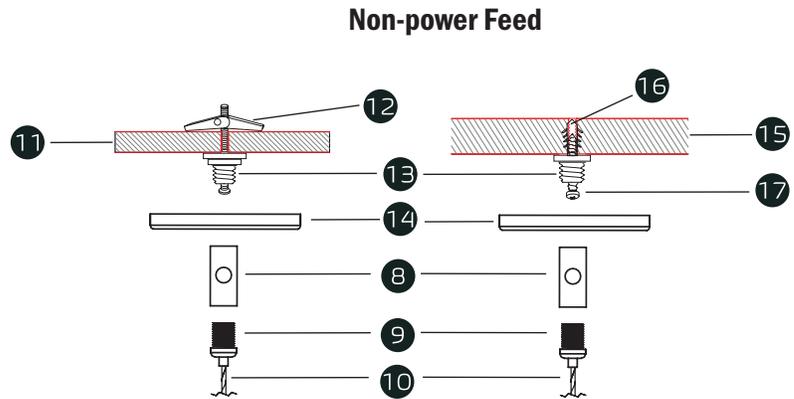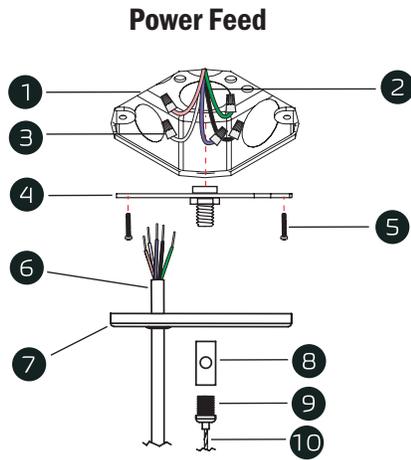

- 1 4" Octagon Junction Box (By Others)
- 2 Power Cord (By Others)
- 3 Wire Nut
- 4 Junction Box Crossbar
- 5 Screw PM4*22
- 6 Power Cord
- 7 4" Power Canopy Kit
- 8 Cable Holder
- 9 Strain Relief Thread Nut
- 10 Aircraft Cable
- 11 Drywall Ceiling (By Others)
- 12 Butterfly Drywall Anchor
- 13 Crimp Stud
- 14 2" Canopy
- 15 Solid Ceiling (By Others)
- 16 Anchor
- 17 Screw PA4*30




Wire Nut




Junction Box Crossbar




Screw PM4*22




Power Cord




4" Canopy Power Kit




Cable Holder




Strain Relief Thread Nut




Aircraft Cable




Butterfly Drywall Anchor



Crimp Stud



2" Canopy




Anchor




Screw PA4*30

STANDALONE INSTALLATION

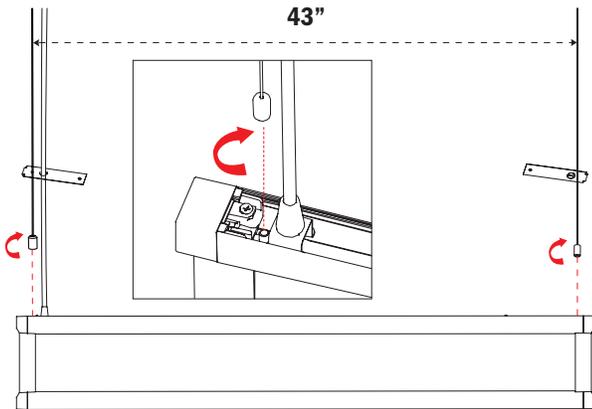



Screw both lower ends of the aircraft cables clockwise and secure them to the top of the housing, ensuring they support the fixture.

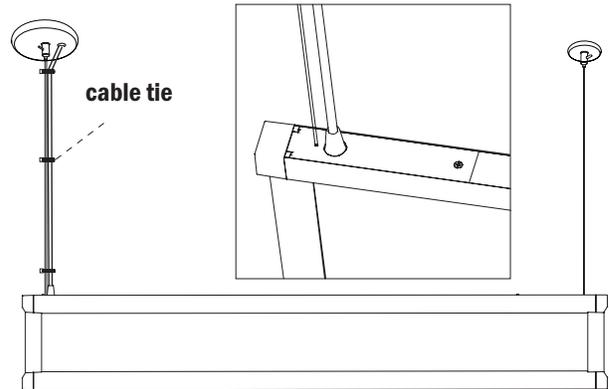


Secure the cover plates on both ends of the fixture. Use a cable tie to fasten the power cord and aircraft suspension cable.

To prevent damage, keep the protective bag and films on the fixtures until construction is complete.



END-TO-END CONNECTED INSTALLATION

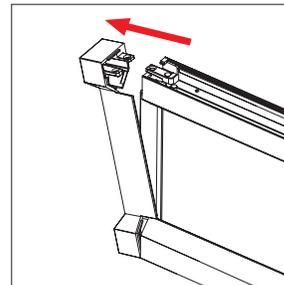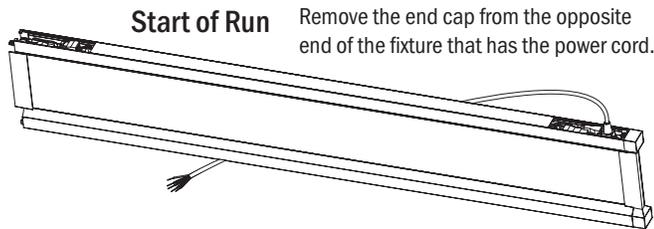


Remove the end cap (non-power feed end) using a screwdriver.

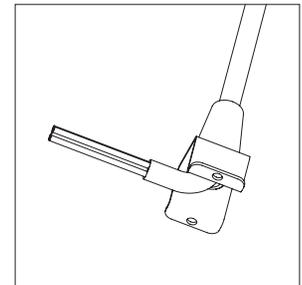


Remove the power cord.


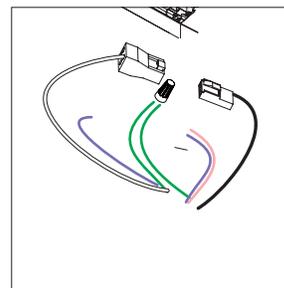
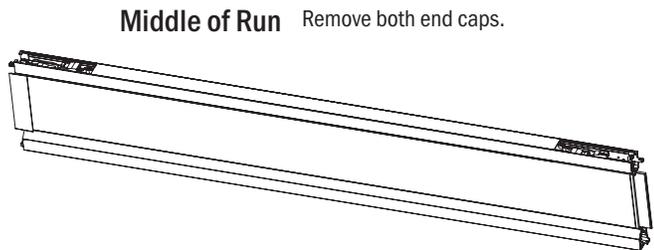


Remove the two screws and pull out the power cord.

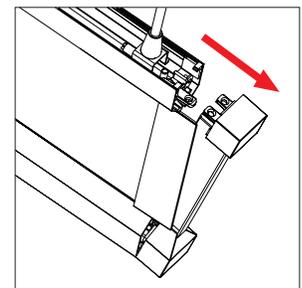


Remove the end cap (power feed end) using a screwdriver.

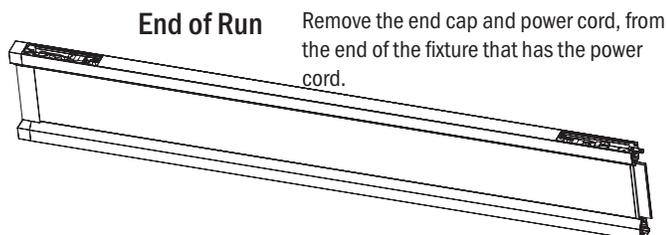


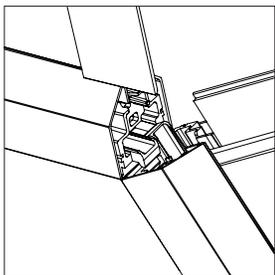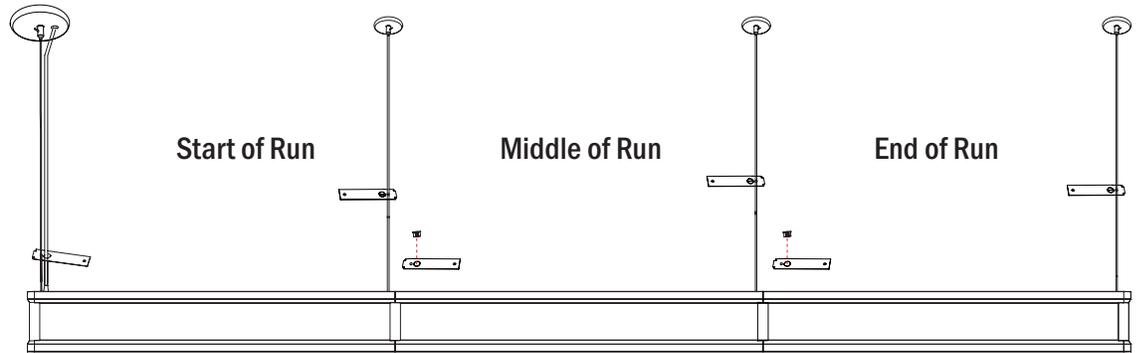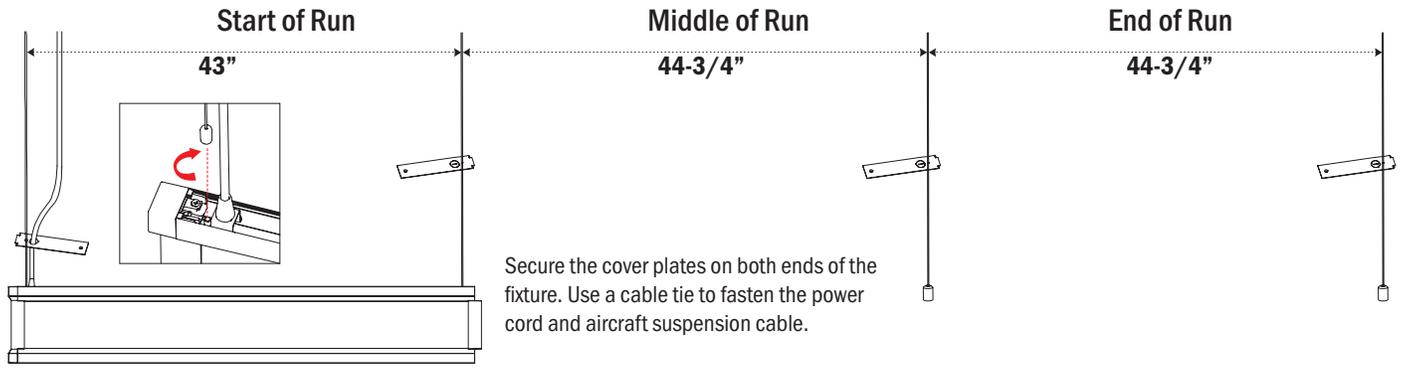

Align

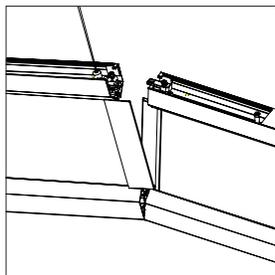

Join the fixtures by sliding them together

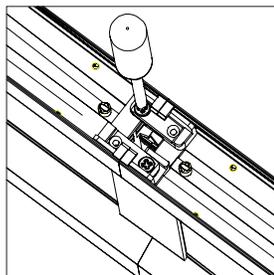

Secure the fixtures together using a screwdriver

Joint multiple fixtures in sequence - starting with the Start of Run, then each fixture in order, finishing with the End of Run - and adjust the aircraft suspension cables with leveling tools to ensure alignment.

Adjust the luminaire height by pulling the cable through the gripper to raise it, or by pressing the top of the gripper cylinder to lower it.



Connect the internal harnesses, secure the cover plates on both ends of the fixture, and fasten the power cord and aircraft suspension cable with a cable tie.

To prevent damage, keep the protective bag and films on the fixtures until construction is complete.

